



70-173-230

Cork Pro Plus

Sound Reducing Underlayment

VERSATILE

For glue down or floating installations of LVT, VET, sheet vinyl and linoleum

ENVIRO FRIENDLY


Made from rapidly renewing and recycled cork with recycled EVA foam

SOUND REDUCTION

2.5 mm thickness reduces impact noise transmission through floors


QUALITY

Highly resistant to residual indentation

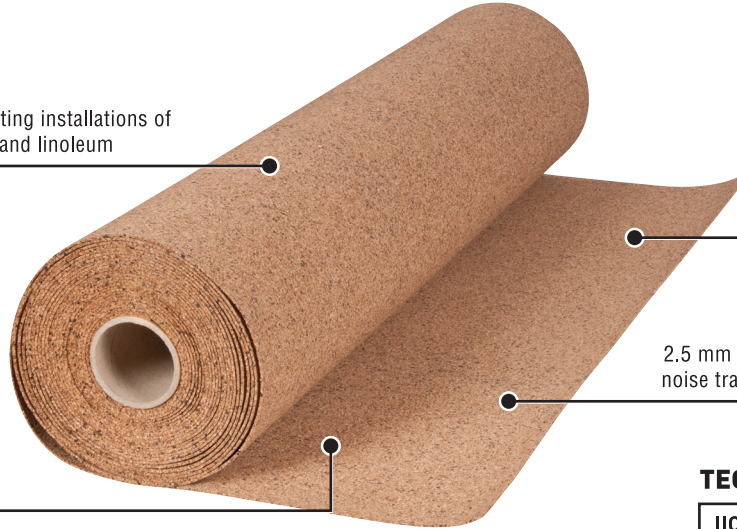


TECHNICAL SPECIFICATIONS


IIC (Impact Sound Transmission Test)	55
STC (Sound Transmission Loss Test)	55
R-Value	.30
Δ Delta Rating	22



Sound Reduction



Levels Minor Imperfections



Double-Bond Compatible



IIC and STC tests measure sound transference from an upper level room to a lower level room. The IIC measures sound such as moving furniture and walking, while the STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50. Δ Delta Rating is the only true measurement of sound reduction from a product (not a floor assembly) in the industry.

Cork Pro Plus is a premium LVT, VET, Sheet Vinyl and Linoleum underlayment. Its 2.5mm thickness reduces impact noise transmission and its high density makes it extremely resistant to residual indentation. It improves walking comfort, is non-absorbent, resistant to mold and mildew, plus levels minor subfloor imperfections. Made from rapidly renewing and recycled cork with recycled EVA foam. Ideal for double bond flooring applications in conjunction with Roberts® 7350 Adhesives.

Cork Pro Plus may contribute toward satisfying the following credits under LEED® Green Building Program:

- MR 4 – Recycled Content - 85% + by weight, post-industrial recycled content. (Possible 1-2 points)
- MR 6 – Rapidly Renewable Materials – 50% by volume rapidly renewing cork granules. (Possible 1 point)
- EQ 4.1 – Low Emitting Materials - (Possible 1 point)

LEED® credit requirements cover the performance of materials, not the performance of an individual product or brand.

SPECIFICATIONS

UNIT OF MEASURE	1 roll per case
COVERAGE	230 sq. ft. per roll
WIDTH OF ROLL	42 in.
LENGTH OF ROLL	65.65 ft.
THICKNESS	2.5 mm
WEIGHT PER ROLL	40 lbs.
DIAMETER OF ROLL	10.83 in.

Quality & Excellence Since 1938.

www.ROBERTSCONSOLIDATED.com

U.S. Headquarters
866 435 8665

Canada
800 840 9422

Europe/Middle East
0031 24 6485348

Australia
011 61 3 9797 1888

New Zealand
64 9 415 9700