

SERENITY

Polyethylene Foam Underlayment

70-010
70-010-XL

COMFORT


3/32" polyethylene foam underlayment for laminate and engineered wood flooring

QUALITY


Corrects minor subfloor imperfections

CONVENIENT


Each roll provides a total of 750 sq. ft.

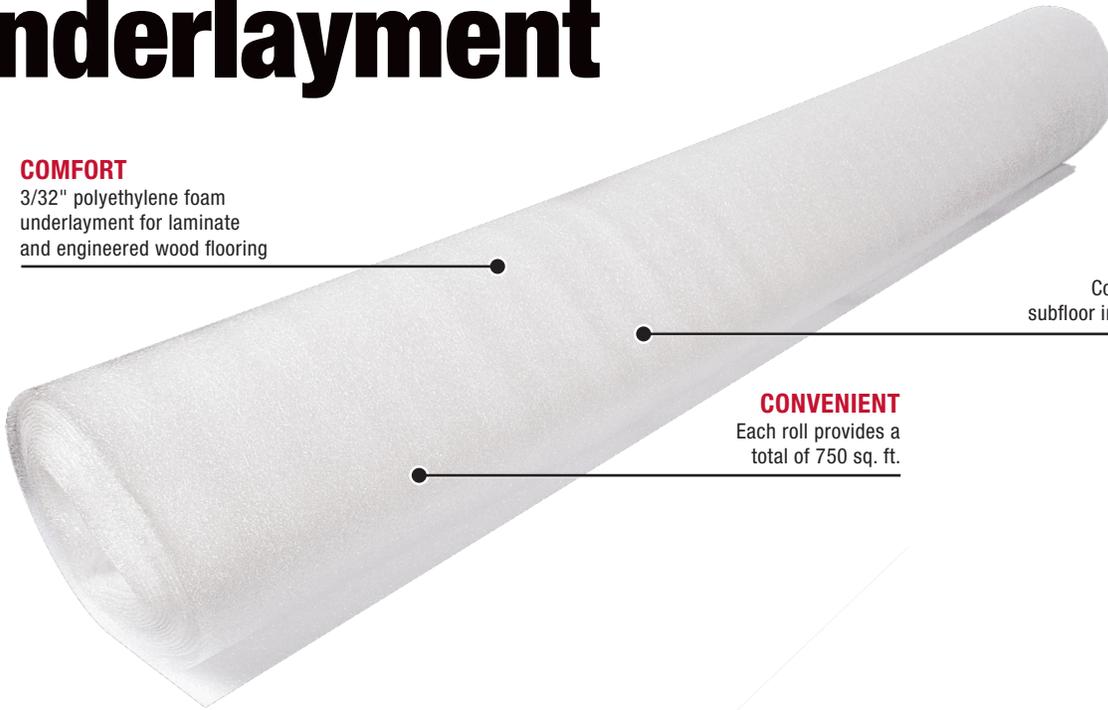

Radiant Heat



Levels Imperfections



Cushions Flooring

made in
USA



The ROBERTS® Serenity Polyethylene Foam underlayment is an ideal underlayment for above-grade installations of laminate and engineered wood flooring over wood subfloors.

It can also be used over concrete slabs with our polyethylene moisture barrier Moisture Barricade (70-115 or 70-116). This product levels minor subfloor imperfections and also provides cushioning.

Scan here for
PRODUCT
INFORMATION



SPECIFICATIONS

| ITEM # | 70-010 | 70-010-XL |
|------------------|---|--------------------|
| UNIT OF MEASURE | 60 rolls / case | 1 each |
| COVERAGE | 100 sq. ft. / roll 6000 sq. ft. / case | 400 sq. ft. / roll |
| WIDTH OF ROLL | 48" | 48" |
| LENGTH OF ROLL | 25 ft. (300") | 100 ft (1200") |
| THICKNESS | 3/32" | 3/32" |
| WEIGHT PER ROLL | 1 lbs. | 4 lbs. |
| DIAMETER OF ROLL | 6.5" | 13" |