

1/4" Cork Underlayment Sheets

70-175



CERTIFIED BY SCS Global Services

SOUND ABSORBING

Reduces sound transmission from both the surface of a floor as well as through the floor to living spaces below

CRACK SUPPRESSION

Acts as a crack isolation membrane that resists transfer of stress cracks from subfloor through to flooring surfaces

INSULATING

Reduces thermal transmission, increasing effectiveness of floor heating systems


EASY TO INSTALL

In both glue-down and loose lay configurations**

R-Value
0.74


IIC STC Δ
74* | 70* | 22

*Ceramic tile on a 6" concrete slab

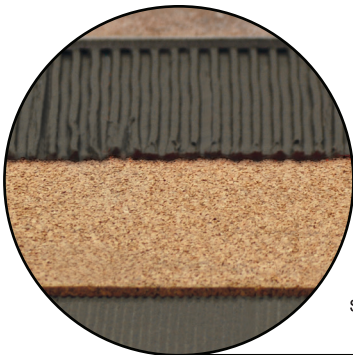

VERSATILE

For use under ceramic tile, stone, engineered hardwood and laminate floors



**For a list of recommended adhesives to use for glue-down installations, please go to robertsconsolidated.com or call 866-435-8665.

ITEM #	DESCRIPTION	QTY	SIZE	COVERAGE
70-175	1/4" (6 mm) Sheets	25 sheets per case	2' x 3'	150 sq. ft./case

Scan here for PRODUCT INFORMATION



Our Natural Cork products may contribute towards satisfying credits under the LEED® Green Building Program in the following areas:

- MR 4.1 - 5% Recycled Content of total building materials (post consumer + 1/2 of post industrial)
- MR 4.2 - 10% Recycled Content of total building materials (post consumer + 1/2 of post industrial)
- MR 6 - Specifying rapidly renewable building materials for 5% of total building materials.
- EQ 4.1 - Low Emitting Materials Adhesives & Sealants (Adhesives Specified meet SCAQMD Rule 1168)

*Ceramic tile on a 6" concrete slab with a suspended ceiling




Natural Cork Underlayment 6 mm

72000Q / 72003Q / 72005Q

INSULATING

Reduces thermal transmission, increasing effectiveness of floor heating systems

Valeur R
0.74

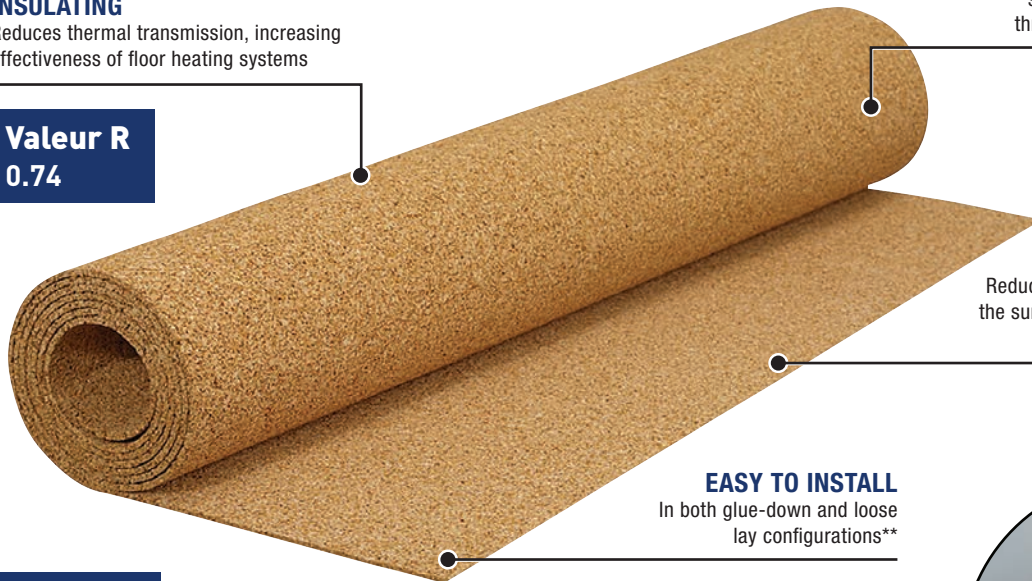

CRACK SUPPRESSION

Acts as a crack isolation membrane that resists transfer of stress cracks from subfloor through to flooring surfaces

SOUND ABSORBING

Reduces sound transmission from both the surface of a floor as well as through the floor to living spaces below

EASY TO INSTALL


In both glue-down and loose lay configurations**

IIC STC Δ
74* | 70* | 22

*Ceramic tile on a 6" concrete slab

VERSATILE

For use under ceramic tile, stone, marble, glued wood flooring and floating floor systems

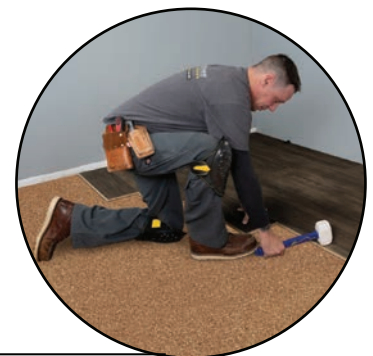

**For a list of recommended adhesives to use for glue-down installations, please go to qep.com or call 866-435-8665.

ITEM #	DESCRIPTION	QTY	SIZE	COVERAGE
72000Q	1/4" (6 mm) Roll	1 Roll	48"x50'	200 ft ² / roll (48"x50')
72003Q	1/4" (6 mm) Roll	1 Roll	48"x25'	100 ft ² / roll (48"x25')
72005Q	1/4" (6 mm) Sheets	5 sheets	2' x 3'	30 ft ² /case (2' x 3')



Our Natural Cork products may contribute towards satisfying credits under the LEED® Green Building Program in the following areas:

- MR 4.1 - 5% Recycled Content of total building materials (post consumer + 1/2 of post industrial)
- MR 4.2 - 10% Recycled Content of total building materials (post consumer + 1/2 of post industrial)
- MR 6 - Specifying rapidly renewable building materials for 5% of total building materials.
- EQ 4.1 - Low Emitting Materials Adhesives & Sealants (Adhesives Specified meet SCAQMD Rule 1168)

Professional Tools for Professional Results

qep.com

F2924-11851