


# UNISON™

## 2-in-1 Underlayment

**COMFORT**

3/32" polyethylene foam increases cushioning between flooring and subfloor



**DURABLE**

2 mil. thick top film protects from harmful moisture vapor

**ADHESIVE STRIP**

Seals out moisture to protect floors

**PROTECTION**



4" film overlap for seamless protection

**VERSATILE**

Can be used over radiant heat

**DISPLAY**

Trilingual display box

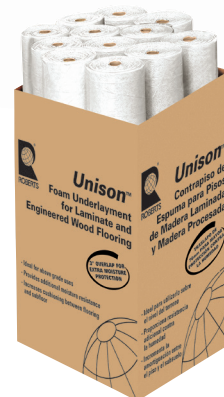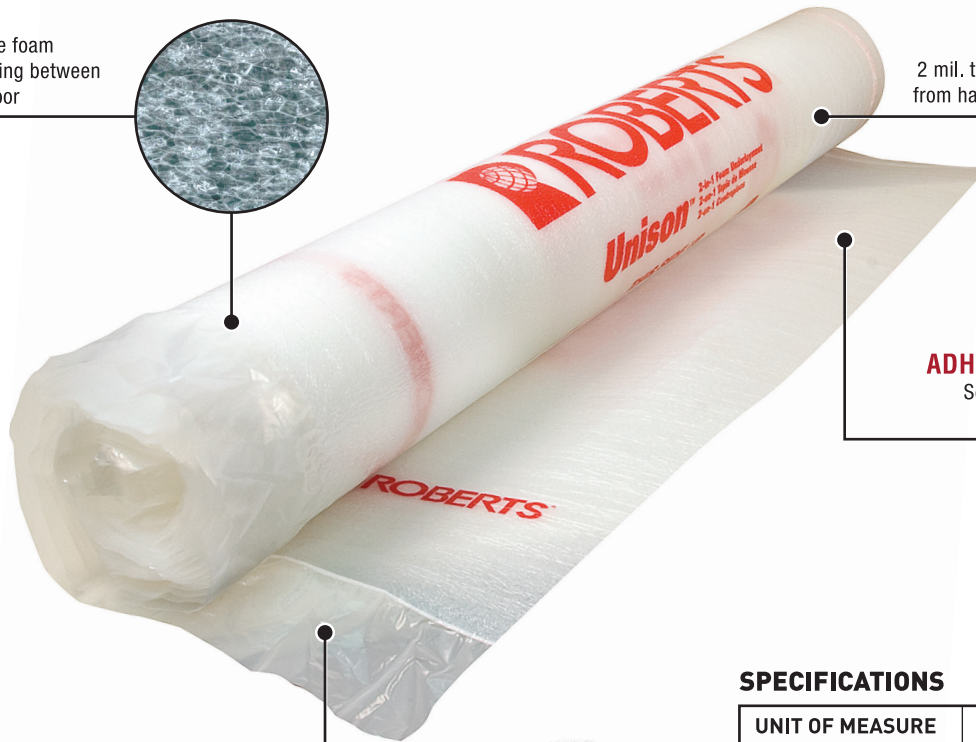

**SPECIFICATIONS**

UNIT OF MEASURE	12 rolls per case
COVERAGE	100 sq. ft. per roll 1200 sq. ft. per case
WIDTH OF ROLL	4 ft. (48")
LENGTH OF ROLL	25 ft. (300")
THICKNESS	3/32"
WEIGHT PER ROLL	2.5 lbs.
DIAMETER OF ROLL	6-1/2"
R-VALUE*	0.29
STC	54
IIC	61

\*R-VALUE refers to the rating used to measure resistance to heat flow

ROBERTS® Underlayment and your laminate floor, the perfect Unison.

In the growing market of laminate and engineered hardwood floating floors, the biggest concerns are noise/sound and water/mold damage. Roberts Underlayments are engineered to meet the highest standards in sound reduction, moisture protection and comfort, and even minor sub-floor corrections.