



FLOORING ADHESIVES & SURFACE PREP

POWERED BY
PROTECTION THAT LIVES ON
MICROBAN®

ROBERTS® KEY MILESTONES

1938: Company founded

1938: Introduced Smoothedge Carpet Gripper

1939: Introduced Rub-er-ege Latex Carpet Adhesive

1949: Filed Carpet Stretching Device patent
(Today's kicker)

1959: Filed trademark for Anchor-Weld

1963: Incorporated

1968: Filed Loop Pile Carpet Cutter patent

1968: Filed Cushion Back Carpet Cutter patent

1968: Filed patent for Carpet Trimmer
(Today's Wall Trimmer)

1975: Filed Carpet Adhesive Seaming Iron patent
(Today's Deluxe Heat Bond Iron)

1981: Hot-Melt Carpet Seaming Tape was introduced and marketed worldwide

1987: Became one of the first to market with solvent-free adhesives

1988: Filed Carpet Stretcher patent
(Today's Power-Lok and Junior Power Stretcher)

1994: Filed Heat Seaming Iron patent (Today's Cool Shield Heat-Bond Seaming Iron)

1997: QEP Co., Inc. acquired Roberts Consolidated Industries, Inc.

1998: Filed Jamb Saw patent

2001: Filed Carpet Knife patent
(Today's Cut & Jam Knife)

2005: Launched AirGuard® Premium Underlayment

2019: Launched Universal+ Adhesives with Advanced Moisture Technology

2021: Filed 4-in-1 Flooring Expansion Spacer patent

2023: Filed patents on 7 new flooring tools

2024: Introduced partnership with Microban® as exclusive North American adhesive provider of superior mold and mildew protection

2024: Introduced FloorScore Certification

2025: Introduced Falcon™ Power 44 Stretcher

2025: Launched 6399 Firm-Set Transitional Pressure Sensitive Adhesive

2025: Next-Generation Adhesive Manufacturing Plant Opening Celebrated

2026: Launched 8799 Resilient Flooring Spray, SR90 Stairs & Repairs High-Performance Utility Adhesive and First Step™ Surface Prep products



The quintessential American dream, ROBERTS® began with a shared vision - a vision for working smarter not harder - to more quickly and efficiently install wall-to-wall carpet. Pooling a modest sum of \$3,000 to invest in plywood, a table saw, shingle nails, pliers and a few other essentials, Roy Roberts, Hugh Livie and Ken Bishop travelled the countryside selling and training installers to use tackless carpet strips.

Decades later, with countless patents and hundreds of products available worldwide, ROBERTS continues to be recognized as the world's authority on flooring installation tools, earning the respect and trust of generations of carpet installers.

We take great pride in the quality and dependability of our ROBERTS products and are committed to the evolution of these offerings to meet the needs and challenges of today's professional installers.

A Brand You Can Trust.

An iconic brand with an established market in more than 100 countries, ROBERTS capitalizes on decades of experience in the industry, fosters True Partnerships with national trade affiliates, and is committed to exceeding your expectations – one product at a time.

- **Award-winning, multilingual Customer Service Team**
- **Expert-level technical support to receive and resolve your product and industry questions**
- **Research & Development Team dedicated to improving, advancing, enhancing, and innovating our products through best of class findings from across the globe**
- **Partnership with industry affiliates including the International Certified Flooring Installers Association, the National Wood Flooring Association, and the Wood Floor Covering Association among others, to support and invest in the trade**
- **1.5M ft² of warehouse and manufacturing space to ensure job-lot quantities and availability of replacement parts**

ROBERTS® On-Going Commitment to Sustainability

We routinely challenge ourselves to reimagine the design, packaging and construction of our products with materials that are recycled, biodegradable or otherwise earth friendly. Our most recent eco-friendly / sustainability efforts include the following:

- **Removed single-use plastic from more than 200 items**
- **Replaced tens of thousands of lbs of virgin plastic with recycled plastic**
- **Eliminated 80,000+ lbs of plastic from our packaging**

Supporting Professional Installers
- Since 1938 -

THE ROBERTS co.





UNPARALLELED COMMITMENT TO QUALITY, PERFORMANCE, AND PARTNERSHIP

At ROBERTS, success isn't solely measured in profits and price points. It is measured in the reliability of our products, the satisfaction of our customers, and the trust placed in the brand by the professional installers and customers that use them.

QUALITY

WORLD-CLASS MANUFACTURING & INNOVATION

In pursuing this success, we have invested in building relationships with some of the world's foremost experts in adhesive formulations, polymer technologies and precision controlled manufacturing processes. Rigorous quality-assurance measures and testing protocols have been put in place to ensure every product that carries our brand exceeds the expectation of our customers.

PERFORMANCE

SATISFACTION AND PEACE OF MIND GUARANTEED

At ROBERTS, customer satisfaction is paramount, which is why we offer a 'best in class' warranty program. In doing so, most of our adhesive and surface prep products offer a one or two year shelf life as well as a one year or limited lifetime warranty.

Visit us online at robertsconsolidated.com for individual warranty terms and details.

PARTNERSHIP

INVESTING IN OTHERS

Success does not happen by accident. At ROBERTS, success has been the result of working with passionate, like-minded people that share our commitments and goals. In partnering with installers, trade affiliates and certification partners, we not only ensure that we're developing products that meet the needs of generations of installers, we are investing in the future of the trade itself.

AFFILIATES:





ROBERTS®

the American Adhesive Company™



For decades, professional installers have turned to ROBERTS for dependable, high-performance flooring installation adhesives.

Over time, our adhesive offering has evolved to meet the changing needs of the flooring industry, with categories designed for every type of a successful installation — from surface preparation to resilient, wood, carpet, multipurpose, and specialty adhesives.

This growth reflects not only innovation in formulation and technologies, but also our on-going collaboration with top-tier installers and the trade affiliates that certify their expertise. By working closely with the professionals who rely on these products every day, we ensure that each product we develop is rigorously tested and proven to perform under real-world conditions.

The result is a portfolio of solutions that support beautiful, enduring flooring installations.

When results and precision matters, there is no second choice. Trust ROBERTS®





THE FIRST & ONLY FLOORING ADHESIVE POWERED WITH MICROBAN®*



ROBERTS® AND MICROBAN® OFFER
SUPERIOR PROTECTION AND PEACE OF MIND

This built-in Microban® antimicrobial technology is integrated during the manufacturing process, and will remain present and active in our adhesives — working at a cellular level to continually disrupt the growth and reproduction of surface-contaminating microorganisms.

PROTECTION THAT LIVES ON
MICROBAN®



Extended Product Shelf Life

Powered with Microban® antimicrobial technology, ROBERTS adhesives offer a **2-Year Shelf Life** when stored in the original, unopened container in a controlled environment.



LIFETIME WARRANTY

Lifetime Warranty

Adhesives bearing this mark qualify for lifetime coverage, only when installation is performed by an Industry Certified Installer in compliance with all product usage guidelines specified by flooring manufacturer, industry standard floor preparation product specifications, and ROBERTS' adhesive specifications.



Products that are **FloorScore** certified meet the air quality emissions criteria for LEED, CHPS and the Green Guide for Health Care.



PREMIUM ADHESIVE SOLUTIONS

ROBERTS® Moisture Control Adhesives

Our best-in-class resilient flooring adhesives are equipped with moisture control technology to withstand moisture vapor emission rates (MVER) up to 12 lbs., and relative humidity (RH) up to 99%. Our premium urethane wood adhesives provide unlimited moisture vapor protection and require no moisture testing.

SAVE TIME. SAVE STEPS. SAVE MONEY.



UP TO 12 LBS.



UP TO 10 LBS.



UP TO 8 LBS.

Ongoing Commitment to Sustainability

ROBERTS® takes environmental responsibilities seriously, strategically participating with governing agencies and organizations to establish the highest standards for sustainable ecologically conscientious products. We continue to minimize our global footprint as well as the environmental impact of our products by ongoing improvement to product technologies, as well as manufacturing, distribution and packaging methods.



ROBERTS Enviro Friendly

When you see our green "e" logo, you are choosing a product that is environmentally conscious, while supporting a company that is committed to protect and sustain our environment.



CRI Green Label +Plus®

The Carpet and Rug Institute's Green Label +Plus® Logo indicates our adhesive has been tested and meets the most stringent criteria for low chemical emissions.



LEED® v4 Qualified Adhesives

LEED® certification is a globally recognized symbol of sustainability achievement. Many of our adhesives contribute one or more points in the LEED® rating systems. Learn more at www.usgbc.org/LEED.



FloorScore Certified

Products that are FloorScore certified meet the air quality emissions criteria for LEED, CHPS and the Green Guide for Health Care.

Private Labeling Available

ROBERTS offers select products for private label as well as custom formula.

Purchase ROBERTS® Adhesives IN BULK and SAVE! See your sales rep for more details!

TABLE OF CONTENTS



10 SURFACE PREP

FS400 FIRST STEP™ PRIMER
FS410 FIRST STEP™ ENCAPSULATOR
FS420 FIRST STEP™ MOISTURE BARRIER

3087 CARPET
3095 HIGH-PERFORMANCE CARPET
6700 INDOOR/OUTDOOR
4002 LATEX CARPET PAD
8015 UNIVERSAL CARPET SEAM SEALER
8502 LATEX CARPET SEAM SEALER



25 CARPET ADHESIVES



28 SPECIALTY ADHESIVES

SR90 STAIRS & REPAIRS
8200 QUICK BOND SPRAY
8600 NOSE BOND®
5900 CERAMIC TILE
7250 CORK UNDERLayment

PALETTE™ QUICK-REPAIR PUTTY
UNIVERSAL REPAIR KIT




31 PUTTY



18 WOOD ADHESIVES

1487 ENGINEERED+
1550 MAX COMPLETE®
1407 ENGINEERED
1406 TONGUE & GROOVE



32 TROWELS

CARPET, VINYL & WOOD
TROWELS AND SNOZZLE



23 MULTIPURPOSE ADHESIVES

3300 MULTIPURPOSE
3085 MULTIPURPOSE
3000 MULTIPURPOSE

32
TROWELS
CARPET, VINYL & WOOD
TROWELS AND SNOZZLE



35
MERCHANTISING
COUNTERTOP DISPLAYS
& IN- AISLE DISPLAYS

FLOORING ADHESIVES & SURFACE PREP

ICON LEGEND



LIFETIME WARRANTY

Adhesives bearing this mark qualify for lifetime coverage, only when installation is performed by an Industry Certified Installer in compliance with all product usage guidelines specified by flooring manufacturer, industry standard floor preparation product specifications, and ROBERTS' adhesive specifications.



TWO YEAR SHELF LIFE

Powered with Microban® antimicrobial technology, ROBERTS adhesives offer a 2-Year Shelf Life when stored in the original, unopened container in a controlled environment.



MICROBAN® PROTECTION

24/7/365 antimicrobial protection integrated during manufacturing to limit the growth of mold, mildew and bacteria.



FLOORSCORE CERTIFIED

Products that are FloorScore certified meet the air quality emissions criteria for LEED, CHPS and the Green Guide for Health Care.



CRI GLP +PLUS

The Carpet and Rug Institute's Green Label +Plus® Logo indicates our adhesive has been tested and meets the most stringent criteria for low chemical emissions.



LEEDS V4 QUALIFIED ADHESIVES

LEED® certification is a globally recognized symbol of sustainability achievement. Many of our adhesives contribute one or more points in the LEED® rating systems. Learn more at www.usgbc.org/LEED.



ENVIRO FRIENDLY

When you see our green "e" logo, you are choosing a product that is environmentally conscious, while supporting a company that is committed to protect and sustain our environment.



ECO FRIENDLY

Zero-VOC products contain zero measured volatile organic compounds, reducing the risk of material harm to users.



MOISTURE PROTECTION

Our best-in-class flooring adhesives are equipped with moisture control technology to withstand moisture vapor emission rates (MVER) up to 12 lbs., and relative humidity (RH) up to 99%.



HIGH-SOLIDS CONTENT

High solids content means the adhesive has a high proportion of bonding material and less water resulting in less shrinkage, faster dry times, greater coverage and superior bond strength.



TRANSITIONAL

An adhesive that is installed in one state, but changes to another as it cures.



FAST DRY TIME

Often referred to for pressure sensitive flooring as "flash time", "dry time" means the material is ready to accept flooring placement or in the case of primers, the material is ready to accept an underlayment or adhesive.



EXTENDED WORKING TIME

Extended working time means you have a longer period after applying the adhesive to manipulate, reposition, and align parts before it starts to cure, allowing for complex applications, larger areas, or precise placement without rushing.



MADE FOR WIDE PLANKS

Made for wide planks means the product is specifically formulated with properties like enhanced bond strength and elasticity to handle the unique challenges of wider and thicker engineered wood planks.



STAIR INSTALLATION

Stair installation requires strong bonding adhesives to permanently fix stair components like treads, risers, and stair nose into place, either as the sole method of attachment or, combination with mechanical fasteners like nails or screws.



STAND AND SPRAY

Stand and spray method for aerosol adhesives, allows for quick application and keeps installers off their knees and can be rapidly applied in large areas.



INDOOR/OUTDOOR

Indoor/outdoor adhesives are bonding agents formulated to withstand both stable indoor conditions and the harsher, fluctuating environments of the outdoors, offering superior resistance to moisture, UV light, and temperatures.



CUTBACK ISOLATOR

Cutback residue isolator adhesives are products designed to seal and neutralize leftover cutback flooring adhesives so new flooring can be safely installed over them.



CHEMICAL BLOCKING TECHNOLOGY

Chemical blocking technology refers to specialized materials to create barriers, trapping contaminants like old adhesives to improve adhesion, safety, and durability for installations over challenging substrates.



ALKALINITY RESISTANCE

Alkalinity resistance means the product creates a barrier that stops high-pH concrete from attacking adhesives and flooring, preventing failure like blistering, peeling, and softening. These polymer-based surface prep products neutralize or block the concrete's natural high alkalinity (pH 12-13), reducing it to a safe pH level (around 9) for better adhesive bonding.

Scan QR codes featured with each product to access more details including product data sheets, safety data sheets, product certification eligibility (i.e., FloorScore, CRI GLP +Plus, Enviro Friendly and LEEDS) and more.



SURFACE PREP

ROBERTS® Surface Prep products help ensure ideal adhesion for a beautiful, professionally finished floor. Developed for use with most subfloors, the primer and cutback isolator prevent over-absorption of adhesive and help ensure balanced alkalinity. Premium moisture barrier offers protection against damage to your floors and peace of mind.



FS400 FIRST STEP™ PRIMER

NEW



Formulated to ensure proper adhesion of flooring to porous substrates, FS400 FIRST STEP™ PRIMER prevents overabsorption of adhesives to create a uniform finish.

- Ready-to-use, single-component primer – no dilution necessary
- Fast-drying formula (30-60 minutes)
- Dries semi-clear, so that layout lines remain visible after application
- Increases coverage rate of adhesive
- Prepares dry substrates for best adhesive performance
- Coverage: Up to 400 per ft²/gal
- Can be used as a primer for gypsum-based substrates prepared in accordance with ASTM F2419

APPLICATION

3/8" Short Nap Roller



Available sizes: 1G (FS400-1), 4G (FS400-4)

FS410 FIRST STEP™ ENCAPSULATOR

NEW



A high-strength polymer formulated to isolate adhesive residues including old cutback, FS410 FIRST STEP™ ENCAPSULATOR can provide a clean, neutral surface for installing new adhesive and flooring to ensure proper bonding.

- Isolates old multipurpose, pressure sensitive, acrylic-based, and cutback adhesive residue
- Ensures proper bonding of new adhesive
- Protects against reactive cutback adhesive residue
- Fast-drying time
- Prepares dry substrates for best adhesive performance
- Coverage: Up to 460 per ft²/gal
- Can be used as a primer for gypsum-based substrates prepared in accordance with ASTM F2419

APPLICATION

3/8" Short Nap Roller



Available sizes: 4G (FS410-4)

FS420 FIRST STEP™ MOISTURE BARRIER

FS420 FIRST STEP™ MOISTURE BARRIER is a liquid-applied membrane designed to control moisture vapor emission rate (MVER) including new or existing concrete slabs up to 100% RH. FS420 MOISTURE BARRIER is a water-based, one-component system that requires no mixing and is formulated to block alkalinity in substrate.

- Rated for 100% RH (ASTM F2170)
- pH resistance up to 14
- Water-based, epoxy-free
- Ready-to-use, no mixing required
- Low VOC, low odor, non-flammable

COMING
SOON
SPRING
2026



APPLICATION

3/8" Short Nap Roller



Available sizes 1G (FS420-1), 4G (FS420-4)





ROBERTS® Resilient Flooring Adhesives offer unique transitional properties, unparalleled levels of moisture control, superior bond strength and application versatility. These adhesives are designed for use with most flooring types including LVT / LVP, VCT, carpet tiles, sheet goods, and many types of underlayment. ROBERTS resilient adhesives are certified for low emissions, most are powered by Microban® for superior mold and mildew protection, and may contribute to one or more points in the LEED® rating system.

6399 FIRM SET TRANSITIONAL PRESSURE SENSITIVE

NEW



A very aggressive, high-tack transitional adhesive that installs like a pressure sensitive adhesive but firms as it cures to form a permanent bond. ROBERTS® 6399 can be used for wet-set or pressure-sensitive installations.

- Compatible with a wide range of resilient and carpet tiles
- Superior shear strength
- Ideal for environments with heavy traffic or rolling loads
- Durability with reduced floor movement
- Easy to use and easy to clean
- Coverage up to 350 ft²/gal
- Apply with a trowel or roller

PRESSURE SENSITIVE, FULL TACK METHOD
Open Time: Up to 60 min. Working Time: Up to 12 hours

WET SET METHOD
Open Time: Up to 20 min. Working Time: Up to 40 min.



Available in 1G (6399-1) and 4G (6399-4)

7399 UNIVERSAL⁹⁹



Featuring tremendous bond strength and maximum moisture vapor resistance, 7399 UNIVERSAL⁹⁹ can be used as a wet-set or pressure-sensitive adhesive with an optional extended working time up to 12 hours.

- LVT, LVP, VCT, VET, solid-backed carpet, carpet tiles, sheet goods, recycled rubber and underlayment
- Troweled or roller-applied application method
- Coverage up to 350 ft²/gal
- Commercial, residential and institutional use, including heavy-rolling loads

PRESSURE SENSITIVE, FULL TACK METHOD
Open Time: Up to 40 min. Working Time: Up to 12 hours

WET SET METHOD
Open Time: Up to 20 min. Working Time: Up to 40 min.



Available in 1G (7399-1) and 4G (7399-4)

7350 UNIVERSAL



ROBERTS® 7350 UNIVERSAL is a maximum performance, pressure-sensitive formula specifically designed for installing most types of resilient flooring including large-format luxury vinyl tiles and planks.

- Ideal for LVT, LVP, VCT, fiberglass-sheet goods and acoustical underlayment
- Releasable, pressure-sensitive formula with aggressive bond
- Troweled or roller-applied application method
- Coverage up to 350 ft²/gal
- Commercial and residential use

PRESSURE SENSITIVE, FULL TACK METHOD
Open Time: Up to 60 min. Working Time: Up to 8 hours

WET SET METHOD
Open Time: Up to 20 min. Working Time: Up to 40 min.



Available in 1Qt (7350-0), 1G (7350-1) and 4G (7350-4)

6280 PRESSURE SENSITIVE

A versatile, pressure-sensitive adhesive, ROBERTS® 6280 designed for the installation of multiple floor covering systems, applied as a releasable or permanent bond method and used over common substrate materials.


- Small-format LVT, modular carpet tile and carpet cushion
- Coverage: Up to 225 ft²/gal
- Commercial and residential use

PRESSURE SENSITIVE, FULL TACK METHOD
Open Time: Up to 60 min. Working Time: Up to 12 hours

WET SET METHOD
Open Time: Up to 20 min. Working Time: Up to 40 min.



TROWELS



Available sizes: 4G (R6280-4)

2057 VCT-EZ™

ROBERTS® 2057 VCT-EZ™ is a translucent drying, thin spread adhesive with aggressive tack; specifically designed for the interior installation of vinyl composition tile.

- Good residual tack and extended working time
- Low odor and low VOC
- Coverage up to 240 ft²/gal
- Commercial and residential use

Open Time: Up to 60 min.
Working Time: Up to 8-12 hours



TROWELS



Available sizes: 1Qt (2057-0), 1G (2057-1) & 4G (2057-4)

2310 FIBERGLASS-BACKED

ROBERTS® 2310 FIBERGLASS-BACKED Sheet Vinyl Adhesive is formulated with advanced tack and flexible working time.

- Formulated for use with fiberglass-sheet vinyl, small-format LVP (up to 12" x 12") and modular carpet tiles
- Acrylic pressure-sensitive with superior bond that remains strong
- Coverage: Up to 240 ft²/gal
- Residential and moderate commercial use

Open Time: Up to 25 min.

Working Time: Up to 45 min.



TROWELS

1/16" x 1/16" x 1/16"

1/16" x 1/32" x 1/32"



Available size: 4G (2310-4)

2350 HARD-SET RESILIENT

Exceptional acrylic formula designed with up-front pressure-sensitive performance, ROBERTS® 2350 HARD-SET Resilient Flooring Adhesive cures to a permanent bond. Excellent for use in installations requiring resistance to indentations from heavy point and rolling loads.

- LVP, LVT, fiberglass-backed sheet vinyl, vinyl-backed carpet tile, rubber sports flooring and rubber tiles
- Excellent initial grab and early bond strength
- Very high peel and sheer strength to lock flooring in place
- Coverage: Up to 300 ft²/gal
- Rated for residential, commercial and heavy rolling loads

Open Time: Up to 15 min.

Working Time: Up to 60 min.



TROWELS

1/16" x 1/16" x 1/16"

1/16" x 1/32" x 1/32"

3/32" x 3/32" x 3/32"



Available sizes: 4G (2350-4)

2001 FELT-BACKED SHEET VINYL

ROBERTS® 2001 is a superior, commercial-grade adhesive developed with optimum open time and working time for positioning felt-backed sheet vinyl flooring.

- Moisture resistance up to 5 lbs / 80% RH
- Lifetime non-staining warranty
- Coverage: Up to 190 ft²/gal
- Rated for residential and moderate commercial traffic

Open Time: Up to 25 min.

Working Time: Up to 45 min.



TROWELS

1/16" x 1/16" x 1/16"



Available sizes: 1G (2001-1) and 4G (2001-4)



7500 VINYL SEAM SEALER

ROBERTS® 7500 VINYL SEAM SEALER creates a strong, durable bond to easily seal seams in many types of vinyl sheet flooring.

- Ideal for fiberglass-backed, felt-backed, heterogeneous and linoleum sheets goods
- Simple one-part application with easy clean up
- Provides a clean, continuous seam, reducing dirt collection
- Coverage: Up to 144 lineal feet/8 oz.
- Creates strong, durable bond that can be walked on within two hours

Open Time: Up to 30 min.

Working Time: Up to 15 min.



Available sizes: 8 oz. bottle (7500-8)

8799 QUICKBOND VINYL FLOORING SPRAY



A premium high-solids adhesive, **ROBERTS® 8799 QUICKBOND VINYL FLOORING SPRAY** is formulated as a one-step application process for luxury vinyl tile (LVT), luxury vinyl plank (LVP) vinyl composition tile, fiberglass-backed tile and carpet tile in residential and commercial applications.

- Quick, easy 'Stand and Spray' installation
- Pressure sensitive, aggressive tack and high-shear strength
- Ready immediately for light foot traffic
- Plasticizer migration resistance
- Coverage up to 150 ft²/19 oz.
- Does not contain chlorofluorocarbons (CFC's), ozone depleting chemicals, or methylene chloride



Extremely Flammable

Available sizes: 19 oz. (8799-19)

7200 HIGH-PERFORMANCE BASE BOND®



TROWELS



ROBERTS® 7200HP HIGH-PERFORMANCE BASE BOND® is a superior-grade, solvent-free adhesive specifically designed for the interior installation of vinyl, rubber and carpet wall base.

- Ideal for use over porous wall surfaces such as gypsum drywall, brick, concrete block, wood, properly cured plaster, and concrete
- Non-staining formula with superior green grab to keep corners wrapped tight
- Rapid set-up for fast, easy installation
- Coverage: Up to 60 linear feet/30-oz. cartridge



Open Time: Up to 10 min.
Working Time: Up to 30 min.

Available sizes: 11 oz. (7200-HP11), 30 oz. (7200-HP30), 1G (7200-HP1) and 4G (7200-HP4)

WOOD



ROBERTS® Wood Flooring Adhesives are designed to perform over most substrates. These versatile formulations bond with engineered wood (wide planks up to 12"), solid wood, and bamboo flooring. Our advanced-performance urethane wood adhesive provides a moisture barrier, sound reduction and crack suppression. These elastomeric and fast-curing adhesives are low VOC, FloorScore certified and LEED® compliant.


*All ROBERTS® Wood Adhesives FloorScore certified and includes Microban with the exception of 1550.

1487 ENGINEERED+



ROBERTS® ENGINEERED+ Wood Flooring Adhesive is an easy to trowel advanced acrylic adhesive, specifically designed for the installation of engineered and parquet wood planks up to 12" wide.

- Ideal with pre-finished engineered wood planks (up to 5/8" thick and 12" wide), plain backed parquet and cork underlayment
- Strong, durable bond
- Low odor and low VOC
- Coverage: Up to 55 ft²/gal
- Commercial and residential use



Open Time: Up to 20 min.


Working Time: Up to 30 min.

Available sizes: 1G (1487-1) and 4G (1487-4)

1550 MAX COMPLETE®



TROWELS



A single-component, moisture-cured urethane adhesive, ROBERTS® 1550 MAX COMPLETE® is formulated for full-surface bonding of solid and engineered wood and mosaic / industrial parquet flooring.

- Sound reduction, crack bridging, and unlimited-moisture protection*
- No moisture testing required
- 25-year bond warranty
- Coverage: Up to 40 ft²/gal
- Commercial and residential use



*Sound Ratings

STC 62 (ASTM E-90)

FIIC 52 (ASTM 989)



Open Time: Up to 60 min.
Working Time: Up to 60 min.

WARNING: Cancer, Birth Defects and Reproductive Harm - www.P65Warnings.ca.gov. See Pg. 39, *Prop 65 - 6

Available sizes: 4G (1550-4)

1407 RAPID REPAIR

ROBERTS® 1407 RAPID REPAIR Wood Adhesive is a high-solids, advanced acrylic latex adhesive designed for the installation of engineered and parquet wood flooring.

- Advanced acrylic latex with 83% solids
- For glue assist when installing engineered wood, wood baseboards and parquet floors
- Ideal for quick repairs, hollow sports and installing thresholds, moldings and medallions
- Low odor and low VOC
- Coverage: Up to 30-oz. cartridge
1/4" bead - 56 lineal feet
3/8" bead - 35 lineal feet
- Commercial and residential use



Open Time: Up to 20 min.

Working Time: Up to 30 min.

Available sizes: 30 oz. (1407-30C)

1406 TONGUE & GROOVE

ROBERTS® 1406 TONGUE & GROOVE Flooring Adhesive is a high-strength, PVA formula specifically designed for floating applications of laminate and wood flooring that require a tongue and groove adhesive.

- Fast-drying formula with exceptional bond strength
- Water-resistant ANSI/HPVA Type II / D3
- Water-based formula is non-flammable, non-toxic, low odor and zero VOC
- Quick, flip-top applicator lid
- Coverage: Up to 400 linear feet/pint



Open Time: Up to 5 min.

Working Time: Up to 15 min.

Available sizes: 1-pint bottle (1406-P)

DISCOVER SUPERIOR

SOUND REDUCTION



WITH THESE UNDERLAYMENTS



FOR VINYL, LAMINATE & WOOD

SOUND BARRICADE

70-197

(200 SQ. FT ROLL) 36" X 66'



- PROPRIETARY BLEND STOPS THE GROWTH OF MOLD AND MILDEW
- RUBBER FOAM TECHNOLOGY PROVIDES SUPERIOR ACOUSTICAL AND CUSHION-LIKE PROPERTIES
- IDEAL FOR FLOATING, NAIL DOWN, STAPLE OR DOUBLE-GlUE DOWN INSTALLATIONS
- SOUND RATINGS: (LVT & LVP) IIC=69, STC=63, DELTA=25; (LAMINATE & WOOD) IIC=68, STC=63, Δ=22



FOR LAMINATE & ENGINEERED WOOD

AIRGUARD®

70-105, 70-105-1

(100 SQ. FT. ROLL) 40" X 30', 40" X 90'

(630 SQ. FT. ROLL) 40" X 189'



- UNIQUE AIRFLOW TECHNOLOGY PROVIDES SUPERIOR MOISTURE PROTECTION
- IDEAL FOR FLOATING LAMINATE & ENGINEERED FLOORING INSTALLATIONS
- SOUND RATINGS: IIC=68, STC=67 AND DE;TA IIC=20

INSTALLATION SUCCESS IS IN YOUR HANDS

THE WIDEST TAILBLOCK IN THE INDUSTRY

FALCON™ POWER 44 STRETCHER

10-284, 10-284V



- FEATURING A PATENT-PENDING TAILBLOCK, THE WIDEST IN THE INDUSTRY (UP TO 44" WITH EXTENSIONS), CAPABLE OF SPANNING A DOOR JAMB
- SWIVEL HEAD THAT LOCKS IN 5 DIFFERENT STRETCH / PATTERN-HOLDING POSITIONS
- ADJUSTABLE PIN PENETRATION FOR DIFFERENT CARPET THICKNESS
- LOW-PROFILE HEAD FEATURES A SIDE KICKING PLATFORM FOR USE WITH KNEE KICKER

FOR ALL OF YOUR UNDERCUTTING NEEDS

LONGNECK PLUS 6" JAMB SAW

10-56



- 1100-WATT, 120V—60HZ, 9.6 AMPS MOTOR
- CUTS FULL INSIDE CORNERS IN MOLDING UP TO 1/2" THICK
- PRECISION HEIGHT ADJUSTMENT FROM FLUSH TO 1-1/16"

PERFECTLY ALIGN PLANKS WITHOUT DAMAGING FLOORING

DOUBLE TAP® REVERSABLE TAPPING BLOCK

10-49



- PATENTED D-HANDLE TAPPING BLOCK WORKS WITH MOST TYPES OF FLOORING INCLUDING RESILIENT VINYL TILE, LAMINATE AND HARDWOOD PLANKS
- DUAL SIDED, WITH EDGES DESIGNED FOR TONGUE AND GROOVE AND CLICK-LOCK FLOORS
- OFFSET HANDLE KEEPS HANDS AND FINGERS AWAY FROM STRIKE ZONE

ACCOMMODATES STRAIGHT EDGES OR ANGLED CUTS UP TO 5/8"

PRECISIONCUTS™ 13" MULTI-FLOOR CUTTER

10-942



- FEATURES A STEEL-ENCASED CAM WITH BALL BEARINGS FOR SMOOTH AND POWERFUL CUTTING ACTION
- DESIGNED WITH BUILT-IN LIGHT FOR PRECISE CUTTING
- BUILT-IN RULER FEATURES BOTH INCHES AND MILLIMETERS FOR CONVENIENCE



ROBERTS® Multipurpose Adhesives are designed with the installer in mind. These formulations offer easy application, extended open time, and are compatible with most residential and commercial carpets. All our multipurpose adhesives are CRI Green Label +Plus™, FloorScore Certified, LEED® compliant, environmentally friendly, and are powered by Microban® for superior mold and mildew protection.

3300 HIGH-PERFORMANCE MULTIPURPOSE

ROBERTS® 3300 HIGH-PERFORMANCE MULTIPURPOSE is a high-solids adhesive formula designed for the installation of hard-to-bond commercial carpet, sheet vinyl, and cork underlayment.

- High-solids content (70%-73%) for the most demanding installations
- Aggressive grab for reduced bubbling and curling
- Moisture control up to 8 lbs. MVER and 85% RH
- Repositionable with excellent re-bond properties
- Coverage: Up to 180 ft²/gal
- Commercial and residential use

Open Time: Up to 30 min.

Working Time: Up to 60 min.



TROWELS



Available sizes: 4G (3300-4)

3085 MULTIPURPOSE

ROBERTS® 3085 MULTIPURPOSE ADHESIVE is a commercial-grade adhesive developed for the direct-glue installation of most commercial / residential carpets.

- Repositionable with excellent re-bond properties
- Excellent for pattern carpets, felt-backed sheet vinyl and unfinished cork underlayment
- Moisture control up to 5 lbs. MVER and 80% RH
- Coverage: Up to 180 ft²/gal
- Heavy residential and moderate commercial use

Open Time: Up to 40 min.

Working Time: Up to 70 min.



TROWELS



Available sizes: 1 Qt (3085-0), 1G (3085-1) and 4G (3085-4)

3000 MULTIPURPOSE

ROBERTS® 3000 MULTIPURPOSE is a contract-grade adhesive formulated for the installation of most types of commercial carpet and felt-backed sheet vinyl.

- Versatile low-odor, low-VOC formula
- Longer open time for optimal positioning
- Moisture control up to 5 lbs. MVER and 80% RH
- Coverage: Up to 180 ft²/gal
- Commercial and residential use

Open Time: Up to 60 min.

Working Time: Up to 90 min.



TROWELS



Available sizes: 1G (3000-1) and 4G (3000-4)



ROBERTS® Carpet Adhesives are industry staples, developed for high performance and formulated for direct and double glue-down applications. These adhesives are intended for commercial installations, and offer optimum resistance to moisture and pH. These trusted formulas are certified for low emissions, environmentally friendly, and are powered by Microban® for superior mold and mildew protection.

3087 CARPET

ROBERTS® 3087 is a high-performance adhesive formulation developed for the direct and double glue-down installations of most carpet types, including Axminster-type backings.

- Ideal for patterned carpet, felt-backed sheet vinyl and unfinished cork underlayment
- Commercial-grade formula with fast green grab for immediate light traffic
- Excellent shear and bond strength
- Extended working time up to 70 minutes
- Coverage: Up to 175 ft²/gal

Open Time: Up to 45 min.

Working Time: Up to 70 min.



TROWELS



Available sizes: 4G (3087-4)

3095 HIGH-PERFORMANCE CARPET

ROBERTS® 3095 HIGH-PERFORMANCE CARPET is a commercial-grade, premium adhesive developed for the most demanding carpet installations, including broadloom carpet.

- High-solids content (70%-73%) formula
- Fast grab and excellent for double-bond installations
- Coverage: Up to 200 ft²/gal
- Residential and commercial carpet with rigid backings



TROWELS



Available sizes: 1G (3095-1) and 4G (3095-4)

6700 INDOOR/OUTDOOR

ROBERTS® 6700 is a solvent-free adhesive designed for the exterior or interior installation of indoor/outdoor carpet.

- Ideal for interior patios, decks, sunrooms and basements
- Excellent moisture resistance when cured
- Coverage: Up to 110 ft²/gal
- Commercial and residential use



TROWELS



Open Time: Up to 30 min.

Working Time: Up to 60 min.

Available sizes: 1 Qt, (6700-0), 1G (6700-1) and 4G (6700-4)

4002 LATEX CARPET PAD

ROBERTS® 4002 is a solvent-free, latex-based, enviro-friendly carpet pad adhesive, developed to quickly bond carpet pads to subfloors in stretch-in carpet installations.

- Prevents pad movement for trouble-free installations
- Permanent bond to porous and non-porous substrates
- Fast grabbing and quick drying
- Coverage: Up to 700 linear feet/gal
- Commercial and residential use



Open Time: Up to 15 min.

Working Time: Up to 45 min.

Available sizes: 1G (4002-1)



8015 UNIVERSAL CARPET SEAM SEALER

ROBERTS® 8015 UNIVERSAL is a solvent-free carpet sealer developed for seaming most types of carpets and preventing edge unraveling. May also be used to repair bubbles in existing installations.

- Fast-drying, solvent-free formula
- Can be used on both direct and double-bond applications
- Coverage: Up to 165 linear feet/8-oz. bottle
- Coverage: 660 linear feet/quart
- Commercial and residential use



Open Time: Up to 10 min.

Working Time: Up to 30 min.

Available sizes: 8 oz. bottle (8015-A) and 1 QT refill (8015-0)



8502 LATEX CARPET SEAM SEALER

ROBERTS® 8502 LATEX CARPET SEAM SEALER is a natural latex adhesive recommended for seam sealing carpets, sealing raw edges, binding, strengthening worn backings and applying new backings on area rugs.

- Provides enhanced slip resistance
- Contains UV tracers for easy detection
- Coverage: 725 linear feet/quart
- Commercial and residential use



Open Time: Up to 10 min.

Working Time: Up to 15 min.

Available sizes: 1 QT bottle (8502-0)

Y
E
A
R
S
L
U
E
S



ROBERTS® Specialty Adhesives are formulated for unique tasks, and to complete some of the most demanding installation projects. From ceramic tile adhesive to stair treads / remodeled risers and web-spray construction adhesives, these specialty products are manufactured with the installer in mind.



SR90 STAIRS & REPAIRS

HIGH-PERFORMANCE UTILITY ADHESIVE

NEW



Is a single-component construction adhesive uniquely formulated for stair tread and remodel riser installations, as well as common repair projects. Easy to apply with a cartridge gun, ROBERTS SR90 Stairs & Repairs provides great green grab and cures quickly to ensure superior bond strength.

- Superior elastomeric and elongation properties
- Helps eliminate squeaking and reduce footfalls sounds
- Coverage up to 225 linear ft / 28.7 oz. cartridge
- For commercial and residential application



Available sizes: 28.7 oz. (SR90-29C)

8200 QUICK BOND SPRAY

ROBERTS® 8200 is a water-resistant, fast-tacking aerosol adhesive with excellent repositioning and the versatility to be used on a wide array of substrates.

- Fast-tack, fast-grab web spray
- Low soak-in with high-bond strength
- Permanent or repositionable bond
- Does not contain chlorofluorocarbons (CFCs), ozone depleting chemicals, or methylene chloride
- Coverage: Up to 100 ft²/12 oz. can
- Commercial and residential use



Extremely Flammable

WARNING: Cancer, Birth Defects and Reproductive Harm - www.P65Warnings.ca.gov. See Pg. 39, *Prop 65 - 3

Available sizes: 12 oz. can (8200-12)

8600 NOSE BOND®

Low-VOC, advanced acrylic adhesive, ROBERTS® 8600 NOSE BOND® is specifically designed for interior stair nose installation on properly prepared wood subfloors.

- Ideal for wood, laminate and rigid PVC stair nose
- Can also be used for wood moldings, wood trim installs and repairs
- Easy clean up
- Coverage: Up to 30 linear ft/ 10-oz. cartridge
- Commercial and residential use

Open Time: Up to 20 min.
Working Time: Up to 30 min.



Available sizes: 10 oz. cartridge (8600-11C)



5900 CERAMIC TILE


High-performance and ready-to-use, ROBERTS® 5900 is used for installing ceramic, porcelain, natural stone, quarry and mosaic tile on floors and walls.

- Type-I Mastic sets quickly
- Spreads effortlessly on floors and walls
- Premixed and ready-to-use
- Easy clean-up
- Coverage: Up to 50 ft²/gal
- Commercial and residential use

Open Time: Up to 35 min.
Working Time: Up to 35 min.



TROWELS



Available sizes: 1G (5900-1) and 3.5G (5900-3)

7250 CORK UNDERLayment

ROBERTS® 7250 CORK UNDERLayment Adhesive is recommended for the installation of acoustical cork underlayment rolls or sheets.

- Solvent-free, low-VOC formula with strong initial grab and good tack
- Acoustical cork underlayment rolls or sheets
- Moisture control up to 5 lbs. MVER and 80% RH
- Extended working time for optimal positioning
- Coverage: Up to 190 ft²/gal
- Commercial and residential use

Open Time: Up to 60 min.
Working Time: Up to 90 min.



TROWELS



Available sizes: 4G (7250-4)



PUTTY

PaletteTM QUICK-REPAIR PUTTY

Ensure the perfect finish on your wood, vinyl or laminate floors with our putties.

Item No.	Description	Case Qty	Packaging
PC7725	Brown Repair Putty	6	3 oz. Tube
PC7726	Light Repair Putty	6	3 oz. Tube
PC7728	Gray Repair Putty	6	3 oz. Tube
PC7730	Tan Repair Putty	6	3 oz. Tube
PC7732	Dark Brown Repair Putty	6	3 oz. Tube
PC7733	Light Gray Repair Putty	6	3 oz. Tube
PC7740	Greige Repair Putty	6	3 oz. Tube
PC7741	Natural Repair Putty	6	3 oz. Tube
PC7742	White Repair Putty	6	3 oz. Tube
PC7743	Black Repair Putty	6	3 oz. Tube



NEW



Made in Canada



UNIVERSAL REPAIR KIT

The Universal Repair Kit is designed to repair cracks, scratches or other damage to wood floors, vinyl floors and counters, wood cabinets, molding and furniture.

- Features five colors and an empty container for custom mixing to match any project
- Easy to sand and stain
- Quick drying and no shrinking

Item No.	Description	Case Qty	Packaging
10-33	Universal Repair Kit	6	Clamshell





TROWELS

If the goal is spreading thin set or adhesive, we have you covered with notched trowels featuring rustproof steel blades, die cast aluminum shanks and contoured handles. Choose from cushioned comfort grip handles, easy grip wood handles, firm grip plastic handles or other adhesive applicators.

DUAL-NOTCH D-HANDLE

Professional quality 11" trowels feature a non-slip, textured grip and a contoured D-shaped handle, for comfort and improved control.



COMING
SOON
SPRING
2026

- Dual-notch design for superior versatility
- Hardened, tempered, coated carbon steel manufacture for toughness and higher wear resistance
- Designed with a D-shaped handle and a wider, taller grip area to accommodate all hand sizes

COMFORT GRIP

High-quality 11" x 4½" trowel with rustproof stainless-steel blade and large, contoured, and cushioned grip handles for comfort.



- Durable 230 mm zinc die-cast shank with nine rivets
- Extra handle-to-shank clearance to allow for complete hand rotation
- First and last rivet reinforced and welded for added durability

WOOD HANDLE

High-quality 11" x 4½" trowel with hardened and tempered steel blade and large wooden handle for an easy grip.



ECONOMY

Engineered for extended wear and tear, Economy Notched Trowels are designed for application of pressure sensitive, resilient adhesives.



made in
USA

COVE BASE ADHESIVE SPREADER

Manufactured with a cold-rolled steel blade for durability, the Cove Base Adhesive Spreader is designed to spread adhesive for a flat, well-bonded cove base installation.



- Fits into a 1 qt. canister of adhesive for quicker, easier application
- Wood handle for comfort
- Features 3/16" x 5/32" V-Notch


Item No.	Description	Case Qty	Packaging
10033	Cove Base Adhesive Spreader	26	Label & Display Box

FOR CARPET, VINYL SHEET, LVT, VCT & WOOD

Notch Size	Application	D-Handle (11" Blade)	Wood Handle (11" Blade)	Comfort Grip/ Economy
1/16" x 1/16" x 1/16" SQ	For carpet tile, fiberglass sheet, felt-backed sheet, luxury vinyl tile, plank, and cork underlayment	49605*	49768	10-181-16*
1/16" x 1/16" x 1/16" SQ	For carpet tile, fiberglass sheet, felt-backed sheet, luxury vinyl tile and plank	49601*	10-810 (with 10° blade angle)	10-823 (with 10° blade angle)
1/8" x 1/8" x 1/8" SQ	For pre-finished parquet and wall base	49602*	49766	
1/8" x 1/8" x 1/8" U	For residential and commercial carpet	49604*		
1/8" x 1/8" x 1/16" Flat-Top V	For secondary-backed carpet, direct glue-down, sheet vinyl installations, and cork underlayment	49604*	49737	10137-12
1/16" x 1/32" x 1/32" U	For VCT, vinyl, luxury vinyl tile and plank	49601*	49771	10-181-16*
1/16" x 1/32" x 5/64" U	For carpet tile, fiberglass sheet, felt-backed sheet, and VCT		49738	
1/4" x 1/4" x 1/4" SQ	For thinset application of ceramic tile 8" x 8" or smaller, laminated wood plank flooring, flat milled solid & shorts or plywood		49713 (QEP) 49915 (QEP)	10113 (QEP) 49915 (QEP)
1/4" x 1/4" x 1/4" Flat-Top V	For pre-finished engineered wood plank, solid wood, bamboo and acrylic impregnated plank flooring	49602*	49769	
1/4" x 3/16" Tiger Tooth®	For bamboo, solid and engineered wood flooring up to 1/2 in. thick	49603*	49767	
3/16" x 1/4" x 1/2" Flat-Top V	For laminated wood plank, solid wood, bamboo and acrylic impregnated plank flooring	49603*	49730	
3/32" x 3/32"" x 3/32" Flat-Top V	For residential and commercial carpet	49605*		

* Double Sided Trowels

Always check adhesive/mortar manufacturer's trowel recommendations before selecting a trowel notch. All trowels measure: width x depth x space apart. Recommended notch sizes by NTCA (National Tile Contractors Association)

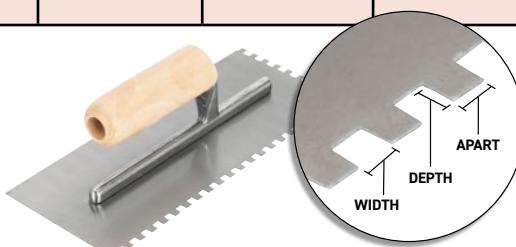

Snozzle™ ADHESIVE APPLICATOR


The SNOZZLE Adhesive Applicator creates a flat, well-bonded installation by spreading 11 rows of adhesive at a time.

- Compatible with 11 oz. and 30 oz. adhesive cartridges and fits most standard applicator guns
- Distributes adhesive in tight spaces where a standard trowel can't be used



Item No.	Description	Case Qty	Packaging
10-981-25	Snozzle Adhesive Applicator	25	Hang Tag & Display Box
10-981	Canada Only: Snozzle Adhesive Applicator	25	Pegged Hang Tag

made in
USA



Palette!
QUICK-REPAIR PUTTY



MERCHANDISING

Increase profitability and generate more sales with numerous merchandising options. Tabletop / retail counter displays and in aisle / end cap displays allow you to feature adhesive cartridges and wood putty repair SKUS. Rugged, 4' gondola showcase top selling tool assortment or can be customized to suit your merchandising needs.



WOOD PUTTY COUNTERTOP DISPLAY

FREE display with the purchase of top selling tools.

- Included header measures
11-1/4" width x 3-3/4" height
- Display measures
21-1/2" width x 11" depth and 20-1/2" height

**\$70
VALUE**

Item# CTDPUTTYRACK
Sign# CTDPUTTYSIGN

WOOD PUTTY IN-AISLE DISPLAY

FREE display with the purchase of top selling tools.

- Included header measures
6-1/2" width x 1-1/2" height
- Display measures
7-1/2" width x 6-1/2" depth and 26-1/2" height



**\$80
VALUE**

Item# 3TRPUTTYRACK
Sign# 3TRPUTTYSIGN



10 OZ. ADHESIVE COUNTERTOP DISPLAY

FREE display with the purchase of top selling tools.

- Included header measures
11-5/8" width x 3-3/16" height
- Display measures 11-5/8" width 17" depth and 8-3/4" height

**\$76
VALUE**

Item# CTD12X9,10OZ
Sign# CTD12X9SIGN

See your sales rep for more details!

10 OZ. CARTRIDGE IN-AISLE DISPLAY

FREE display with the purchase of top selling tools.

- Included header measures
4-5/8" width x 3-5/8" height
- Display measures
4-5/8" width x 5" depth
and 41" height



**\$96
VALUE**

Item# 3TB41X5, 10OZ
Sign# 3TB41X5SIGN

30 OZ. CARTRIDGE COUNTERTOP DISPLAY

FREE display with the purchase of top selling tools.

- Included header measures
16-5/8" width x 3-1/2" height
- Display measures 16-5/8" width
17" depth and 8-7/8" height



**\$92
VALUE**

Item# CTD16X9,30OZ
Sign# CTD16X9SIGN

30 OZ. CARTRIDGE IN-AISLE DISPLAY

FREE display with the purchase of top selling tools.

- Included header measures
5-7/8" width x 5-1/2" height
- Display measures
5-7/8" width x 6-1/8" depth
and 57" height



**\$85
VALUE**

Item# 3TB56X6, 30OZ
Sign# 3TB56X6SIGN

See your sales rep for more details!

INDEX By Item Number

ITEM #	DESCRIPTION	PAGE	ITEM #	DESCRIPTION	PAGE
10-33	UNIVERSAL REPAIR KIT	31	8502	LATEX CARPET SEAM SEALER	27
10-49	DOUBLE TAP® REVERSIBLE TAPPING BLOCK	22	8600	NOSE BOND® STAIR NOSE ADHESIVE	30
10-56	LONGNECK PLUS 6" JAMB SAW	22	8799	QUICK BOND™ VINYL FLOORING SPRAY	17
10-942	13" MULTI-FLOOR CUTTER	13	10113	1/4" X 1/4" X 1/4" SQ-NOTCH ECONOMY TROWEL	34
10-181-16	DUAL NOTCH ECONOMY TROWEL	33	10137-12	1/8" X 1/8" X 1/16 FLAT-TOP V-NOTCH ECONOMY TROWEL	34
10-810	1/16" X 1/16" X 1/16" SQ-NOTCH WOOD HANDLE TROWEL	34	49601	1/16" x 1/16" x 1/16" SQ-NOTCH; 1/16" x 1/32" x 1/32" U-NOTCH	34
10-823	1/16" X 1/16" X 1/16" SQ-NOTCH COMFORT GRIP TROWEL	34	49602	1/4" X 1/4" X 1/4" FLAT-TOP V NOTCH; 1/8" X 1/8" X 1/8" SQ-NOTCH	34
10-981	SNOZZLE ADHESIVE APPLICATOR (CANADA ONLY)	34	49603	1/4" X 3/16" TIGER TOOTH V-NOTCH; 3/16" X 1/4" X 1/2" FLAT-TOP V-NOTCH	34
10-981-25	SNOZZLE ADHESIVE APPLICATOR	34	49604	1/8" x 1/8" x 1/16" FLAT-TOP V-NOTCH; 1/8" x 1/8" x 1/8" U-NOTCH	34
70-197	SOUND BARRICADE UNDERLayment	22	49605	1/16" x 1/16" x 1/16" SQ-NOTCH; 3/32" x 3/32" x 3/32" FLAT-TOP V-NOTCH	34
1406-P	TONGUE & GROOVE FLOORING ADHESIVE	20	49713	1/4" X 1/4" X 1/4" SQ-NOTCH WOOD HANDLE TROWEL	34
1407-30	RAPID REPAIR WOOD ADHESIVE	20	49730	3/16" X 1/4" X 1/2" FLAT-TOP V-NOTCH WOOD HANDLE TROWEL	34
1487	ENGINEERED+ WOOD ADHESIVE	19	49738	1/16" X 1/32" X 5/64" U-NOTCH WOOD HANDLE TROWEL	34
1550	MAX COMPLETE® WOOD FLOORING ADHESIVE	19	49767	1/4" X 3/16" TIGER TOOTH NOTCH WOOD HANDLE TROWEL	34
2001	FELT-BACKED SHEET VINYL ADHESIVE	16	49769	1/4" X 1/4" X 1/4" FLAT-TOP V-NOTCH WOOD HANDLE TROWEL	34
2057	VCT-EZ® VINYL COMPOSITION TILE ADHESIVE	15	49771	1/16" X 1/32" X 1/32" U-NOTCH WOOD HANDLE TROWEL	34
2310	FIBERGLASS-BACKED SHEET VINYL ADHESIVE	16	49766	1/8" X 1/8" X 1/8" SQ-NOTCH WOOD HANDLE TROWEL	34
2350	HARD-SET RESILIENT FLOORING ADHESIVE	16	49768	1/16" X 1/16" X 1/16" SQ-NOTCH WOOD HANDLE TROWEL	34
3000	MULTIPURPOSE ADHESIVE	24	49771	1/16" X 1/32" X 1/32" U-NOTCH WOOD HANDLE TROWEL	34
3085	MULTIPURPOSE ADHESIVE	24	49915	1/4" X 1/4" X 1/4" SQ-NOTCH COMFORT GRIP TROWEL	34
3087	CARPET ADHESIVE	26	FS400	FIRST STEP™ PRIMER SURFACE PREP	11
3095	HIGH-PERFORMANCE CARPET ADHESIVE	26	FS410	FIRST STEP™ ENCAPSULATOR SURFACE PREP	11
3300	HIGH-PERFORMANCE MULTIPURPOSE ADHESIVE	24	FS420	FIRST STEP™ MOISTURE BARRIER SURFACE PREP	12
4002	LATEX CARPET PAD ADHESIVE	27	PC7725	BROWN QUICK-REPAIR PUTTY	31
5900	CERAMIC TILE ADHESIVE	30	PC7726	LIGHT QUICK-REPAIR PUTTY	31
6280	PRESSURE SENSITIVE ADHESIVE	15	PC7728	GRAY QUICK-REPAIR PUTTY	31
6700	INDOOR/OUTDOOR CARPET ADHESIVE	27	PC7730	TAN QUICK-REPAIR PUTTY	31
7200HP	HIGH-PERFORMANCE BASE BOND® WALL BASE ADHESIVE	17	PC7732	DARK BROWN QUICK-REPAIR PUTTY	31
7250	CORK UNDERLAYMENT ADHESIVE	30	PC7733	LIGHT GRAY QUICK-REPAIR PUTTY	31
7350	UNIVERSAL RESILIENT FLOORING & VINYL BACKED CARPET ADHESIVE	14	PC7740	GREIGE QUICK-REPAIR PUTTY	31
7399	UNIVERSAL® RESILIENT FLOORING & MODULAR CARPET TILE ADHESIVE	14	PC7741	NATURAL QUICK-REPAIR PUTTY	31
7500	VINYL SEAM SEALER	17	PC7742	WHITE QUICK-REPAIR PUTTY	31
8015	UNIVERSAL CARPET SEAM SEALER	27	PC7743	BLACK QUICK-REPAIR PUTTY	31
8200	QUICK BOND™ SPRAY ADHESIVE	29			

WORLD-CLASS MANUFACTURING



AFFILIATES



ROBERTS® WARRANTY

All ROBERTS® adhesives include a manufacturer's limited warranty ensuring the product is free from defects in materials and workmanship for a period up to one-year from the date of purchase. This warranty does not cover accidental damages, unreasonable or improper use, normal wear and tear, loss of use, or consequential damages. Please refer to Product Data Sheets for specific information pertaining to shelf life guarantee. Visit robertsconsolidated.com, robertsconsolidated.com/ca to review warranty documents for additional information (coverage, limitations, and requirements) or call (866) 435-8665.

ABOUT CALIFORNIA PROPOSITION 65

Proposition 65 is a California regulatory law that requires businesses to notify California consumers about specific chemicals in the products they purchase so they can make informed decisions about protecting themselves from exposure to these chemicals. This law requires companies to properly label products that contain chemical(s) above certain threshold levels.

As part of Q.E.P. Co. Inc.'s continued best business practice and compliance program, we comply with Proposition 65 warning requirements and provide product-associated warnings. We are dedicated to meeting consumer product safety requirements applicable to our products and strive to provide high quality and safe products.

For more information on California Proposition 65, go to www.P65Warnings.ca.gov.

*Prop 65 - 1. **⚠WARNING:** This product can expose you to chemicals including DEHP, which is known to the State of California to cause cancer, birth defects and other reproductive harm.

*Prop 65 - 2. **⚠WARNING:** This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer, birth defects and other reproductive harm.

*Prop 65 - 3. **⚠WARNING:** This product can expose you to chemicals including Nickel (Metallic), which is known to the State of California to cause cancer.

*Prop 65 - 4. **⚠WARNING:** This product can expose you to chemicals including Lead and DEHP which is known to the State of California to cause cancer, birth defects or other reproductive harm.

*Prop 65 - 5. **⚠WARNING:** This product can expose you to chemicals including Quartz and Styrene, which are known to the State of California to cause cancer and Methanol, which is known to the State of California to cause birth defects or other reproductive harm.

*Prop 65 - 6. **⚠WARNING:** This product can expose you to chemicals including Silicia (crystalline, respirable) and Diisodecyl Phthalates which are known to the state of California to cause cancer, and birth defects or other reproductive harm.

ROBERTS® and the e® logo are registered trademarks of Roberts Consolidated Industries, Inc.

CRI™ and CRI Green Label +Plus® is a registered trademark of The Carpet and Rug Institute.

LEED® and its related logo, is a trademark owned by the U.S. Green Building Council® and is used with permission.

Microban® is a registered trademark of Microban Products Company.

BASE BOND® is a registered trademark of Q.E.P. Co., Inc.

MAXCOMPLETE® is a registered trademark of Q.E.P. Co., Inc.

NOSE BOND® is a registered trademark of Q.E.P. Co., Inc.

The products, specifications, and Prop 65 Warnings listed in this catalog are current as of the printed date of this catalog and are subject to change. Access product data sheets, technical bulletins, warranties and SDS documents 24/7 at robertsconsolidated.com.



FLOORING ADHESIVES & SURFACE PREP

Supporting Professional Installers Since 1938

Products on Front Cover:

6399-4 Firm-Set Transitional Pressure Sensitive Adhesive, 49601 Dual -Notch Adhesive Trowel, 79034 Pro Comfort Knee Pads, 10-140 30' Tape Measure and 10-260 Deluxe Grip Tool Pouch

Products on Back Cover:

6399-4 Firm-Set Transitional Pressure Sensitive Adhesive, 49601 Dual -Notch Adhesive Trowel, 79034 Pro Comfort Knee Pads



1001 Broken Sound Parkway, NW
Boca Raton, Florida 33487

For more information call 866-435-8665
Se habla español | français parlé



robertsconsolidated.com
qepcorporate.com

Scan here
for the latest



ROBERTS®
TOOL CATALOG

Scan here
for the latest



ROBERTS®
UNDERLAYMENT
PRODUCT GUIDE

Scan here
for the latest



ROBERTS®
ADHESIVE
CATALOG

Scan here
for the latest



ROBERTS®
ADHESIVE
PRODUCT GUIDE

J0126-12251
ROBADHESIVE2026